


LED Bulbs

KLMA19-6



- BULB TYPE: A19 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: 6W
- LED TYPE: 87 LED's
- LUMINOUS FLUX: 300 Lm
- SIZE: 6.09 cm (Dia.) X 10.87 cm (H)
- COLOR: 3000K -4000K, 5000K-6000K
- AVERAGE LIFE: 50,000 HOURS

KLMA19-7



- BULB TYPE: A19 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: 7W
- LED TYPE: 110 LED's
- LUMINOUS FLUX: 400 Lm
- SIZE: 4.75 cm (Dia.) X 16.10 cm (H)
- COLOR: 3000K -4000K, 5000K-6000K
- AVERAGE LIFE: 50,000 HOURS

KLMA19-12



- BULB TYPE: A19 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: 12W
- LED TYPE: 158 LED's
- LUMINOUS FLUX: 650 Lm
- SIZE: 6.75 cm (Dia.) X 11.34 cm (H)
- COLOR: 3000K -4000K, 5000K-6000K
- AVERAGE LIFE: 50,000 HOURS

T8 LED Bulbs



- BULB TYPE: T8
- LED TYPE: SUPER BRIGHT CREE LED'S
- COLOR TEMPERATURE: 4500-5500K, 5500-6500K
- INPUT VOLTAGE: 110-260V AC
- BEAM ANGLE: 120 DEGREE
- TUBE MATERIAL: TRANSPARENT PC AND ALUMINUM ALLOY
- EFFICIENCY: 80 LUMENS / W
- BUILT IN DRIVER
- AVERAGE LIFE: 50,000 HOURS
- WARRANTY: 18 MONTHS

Model	T8-IL600-10	T8-IL1200-20	T8-IL1500-25
Number LED's	10*1W CREE	20*1 CREE	25*1 CREE
LED flux (LM)	750(WW),850(W)	1500(WW),1700(W)	1875(WW),2125(W)
Power	10W	20W	25W
Size (L)*(D)	600*30mm	1200*30mm	1500*30mm

T5 Fluorescent Fixtures

ILCA




The new slender ILCA series fixtures offer brilliant lighting and energy savings with the use of T5 lamps. The ILCA series achieves the highest output with greater efficiency when compared to T8 and T12. The built in electronic ballast not only eliminates the need for an external power supply, but allows a compact design that generates less heat. Simply mount the brackets, snap in the fixture and plug in the power cord. They can be easy interconnected.

Specifications:

Product Code	Input Voltage	Min. Start Temperature	Lamp Type	Watts (W)	Optimal Lumens	Max. # Fixture Connections
ILCA-6	120VAC/60Hz	-15C/5F	T5	6	480	25
ILCA-8	120VAC/60Hz	-15C/5F	T5	8	680	18
ILCA-14	120VAC/60Hz	-15C/5F	T5	14	1350	10
ILCA-21	120VAC/60Hz	-15C/5F	T5	21	2100	7
ILCA-28	120VAC/60Hz	-15C/5F	T5	28	2900	5
ILCA-35	120VAC/60Hz	-15C/5F	T5	35	3650	4

Dimensions:

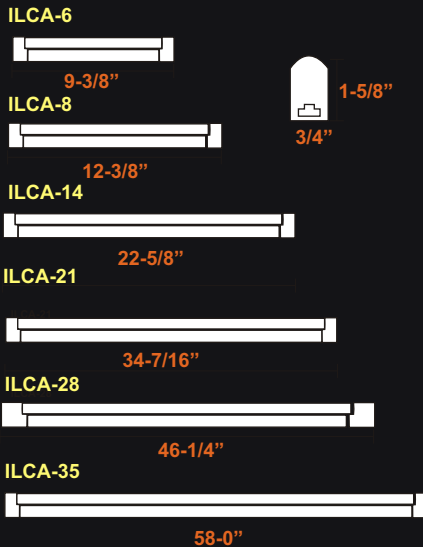

Distributed by:

Go Green New LED Lighting



KLMR11-2



- BULB TYPE: MR11 LED
- INPUT VOLTAGE: 12V AC/DC
- OUTPUT POWER: **2W**
- LED TYPE: 2W CREE
- LUMINOUS FLUX: 100 (WW), 130 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLMR16-5



- BULB TYPE: MR 16 LED
- BASE TYPE: GU5.3
- INPUT VOLTAGE: 12V AC/DC
- OUTPUT POWER: **5W**
- LED TYPE: 3*1.5W CREE
- LUMINOUS FLUX: 240 (WW), 300 (W)
- TEMPERATURE: < 63 CENTIGRADE
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLMR16-9



- BULB TYPE: MR 16 LED
- BASE TYPE: GU5.3
- INPUT VOLTAGE: 12V AC/DC
- OUTPUT POWER: **9W**
- LED TYPE: 3*3W CREE
- LUMINOUS FLUX: 315 (WW), 370 (W)
- TEMPERATURE: < 63 CENTIGRADE
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLGU10-5



- BULB TYPE: GU 10 LED
- INPUT VOLTAGE: 100-260V
- OUTPUT POWER: **5W**
- LED TYPE: 3*1.5W CREE
- LUMINOUS FLUX: 240 (WW), 300 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLGU10-9



- BULB TYPE: GU 10 LED
- INPUT VOLTAGE: 100-260V
- OUTPUT POWER: **9W**
- LED TYPE: 3*3W CREE
- LUMINOUS FLUX: 315 (WW), 370 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLHR16-5



- BULB TYPE: HR 16 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **5W**
- LED TYPE: 3*1.5W CREE
- LUMINOUS FLUX: 240 (WW), 300 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLHR16-9



- BULB TYPE: HR 16 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **9W**
- LED TYPE: 3*3W CREE
- LUMINOUS FLUX: 315 (WW), 370 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLPR20-5



Dimmable (optional)

- BULB TYPE: PAR20 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **5W**
- LED TYPE: 3*1.5W CREE
- LUMINOUS FLUX: 210 (WW), 270 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLPR20-9



Dimmable (optional)

- BULB TYPE: PAR20 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **9W**
- LED TYPE: 3*3W CREE
- LUMINOUS FLUX: 315 (WW), 370 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KRPR30-7



- BULB TYPE: R-G-B PAR30 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-240V AC
- OUTPUT POWER: **7W**
- LED TYPE: 7*1W EDISON
- LUMINOUS FLUX: 300
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45 LED
- REMOTE CONTROL COLOR CHANGE

KLPR30-15



Dimmable (optional)

- BULB TYPE: PAR30 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **15W**
- LED TYPE: 5*3W CREE
- LUMINOUS FLUX: 598 (WW), 680 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLPR30-21



Dimmable (optional)

- BULB TYPE: PAR30 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **21W**
- LED TYPE: 7*3W CREE
- LUMINOUS FLUX: 795 (WW), 950 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLPR38-15



Dimmable (optional)

- BULB TYPE: PAR38 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **15W**
- LED TYPE: 5*3W CREE
- LUMINOUS FLUX: 981 (WW), 1100 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLPR38-21



Dimmable (optional)

- BULB TYPE: PAR38 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **21W**
- LED TYPE: 7*3W CREE
- LUMINOUS FLUX: 1150 (WW), 1350 (W)
- AVERAGE LIFE: 50,000 HOURS
- BEAM ANGLE: 30, 45

KLGA19-5/10



- BULB TYPE: A19 LED
- BASE TYPE: E27
- INPUT VOLTAGE: 100-260V AC
- OUTPUT POWER: **5W/10W**
- LED TYPE: 3*2W/5*2W EDISON
- LUMINOUS FLUX: 160 (WW), 210 (W)
260(WW), 350 (W)
- TEMPERATURE: < 63 CENTIGRADE
- AVERAGE LIFE: 50,000 HOURS